



Technical name:
Ferrosilicon
45%



Ferrosilicon 45%


(30 x 120 mm)

Ferrosilicon 45% This product is manufactured from selected raw materials, with high purity degree and rigorous quality control, which guarantees wide homogeneity among lots. It is used to correct silicon amount in all the types of fusing ovens. It is widely used in oven Cubilô.

Chemical Properties (%)

ELEMENTS (%)					
Si (min)	Ca (max)	Al (max)	Mn (max)	P (max)	C (max)
44 - 49	1,0	0,80	0,70	0,030	0,30

GRAIN SIZE (%)		
Sieve (mm)	30,00	120,00
Through	≤ 10,00	-
Retained	-	≤ 5,00

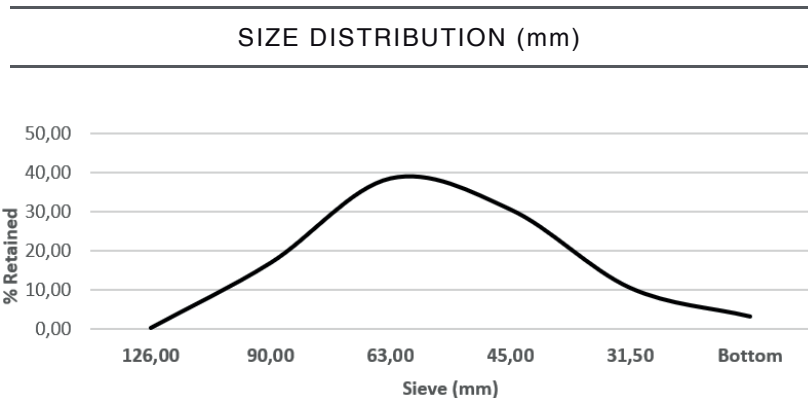

+55 85 3636.0901
Rua Desembargador Lauro Nogueira, 1500, 9º andar, sala 909,
Papicu, CEP: 60.176-065, Fortaleza - CE.
E-mail: sales@libraligas.com.br



www.libraligas.com.br